

Two or three bare, soft annealed copper conductors, 60°C Polyvinyl chloride insulation and flexible polyvinyl chloride jacket.

APPLICATION


CL: lamp cord

SVT: designed for use with vacuum cleaners, food processors and office equipment.

Voltage rating: 300 V

CONSTRUCTION ELEMENTS

- A. Flexible copper conductor
- B. PVC insulation
- C. PVC jacket

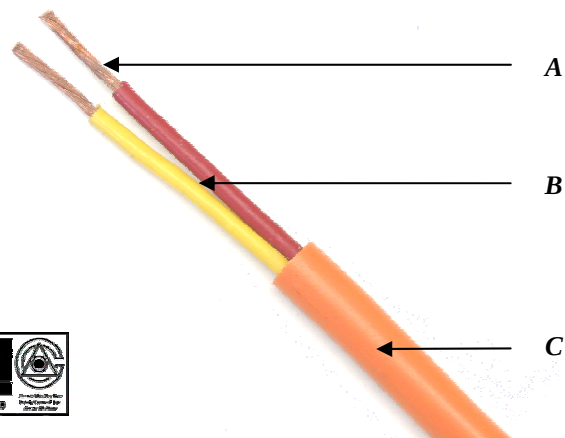

STANDARDS

Flexible cord and fixture wire: UL – 62

CABLE DATA

Size AWG	Construction		Conductor Diameter (inches)	Thickness (inches)		Aprox. outside Diameter (inches)	Weight Pounds
	N° of wires	Diameter of wires (inches)		Insulation	Jacket		
TYPE CL							
2x22	7	0.010	0.030	0.019	0.019	0.181	21
2x20	7	0.013	0.038	0.019	0.019	0.196	26
2x18	10	0.320	0.046	0.019	0.024	0.219	33
2x16	16	0.320	0.058	0.019	0.024	0.244	44
3x18	41	0.006	0.046	0.019	0.032	0.250	40
TYPE SVT							
2x18	41	0.006	0.046	0.016	0.032	0.220	30
2x16	65	0.006	0.058	0.016	0.032	0.244	40
3x18	41	0.006	0.046	0.016	0.032	0.234	38
3x16	65	0.006	0.058	0.016	0.032	0.259	50

The data listed above is approximate and subject to normal manufacturing tolerances. Specifications are subject to change without notice.