


Two soft annealed copper conductors, 60°C Polyvinyl Chloride insulation assembled twisted.

APPLICATION

Provisional light systems
Voltage rating: 300 V

CONSTRUCTION ELEMENTS

- A. Flexible copper conductor
- B. PVC insulation

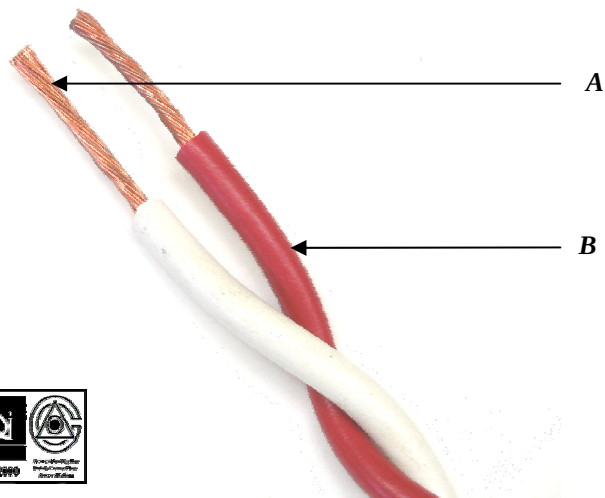

STANDARDS

Flexible cord and fixture wire: UL-62

CABLE DATA

Size AWG	Construction		Conductor Diameter (inches)	Insulation thickness (inches)	Aprox. outside dimensions (inches)	Aprox. total weight (pounds / kft)
	N° of wires	Diameter of wires (inches)				
TWO CONDUCTORS						
22	7	0.010	0.030	0.031	0.094 x 0.189	11
20	7	0.013	0.038	0.031	0.102 x 0.205	15
18	10	0.013	0.046	0.031	0.108 x 0.216	19
16	16	0.013	0.058	0.031	0.122 x 0.244	27
14	26	0.013	0.074	0.047	0.169 x 0.339	48
12	28	0.015	0.093	0.047	0.189 x 0.378	66
10	28	0.015	0.117	0.047	0.213 x 0.425	95

The data listed above is approximate and subject to normal manufacturing tolerances. Specifications are subject to change without notice.