


Two or three annealed flexible copper conductor, 60°C polyvinyl chloride insulation, assembled flat parallel.

APPLICATION

Flexible extensión for indoor applications.
Voltage rating: 300 V

CONSTRUCTION ELEMENTS

- A. Flexible cooper conductor
- B. PVC jacket

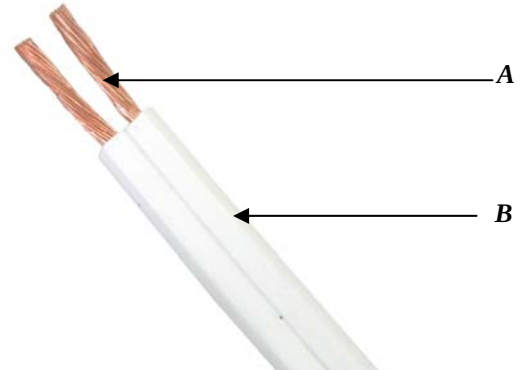

STANDARDS

Flexible cord and fixture wire: UL – 62

CABLE DATA

Size AWG	Construction		Conductor Diameter (inches)	Insulation Thickness (inches)	Aprox. outside dimensions (inches)	Aprox. Total Weight (pounds / kft)
	N° of wires	Diameter of wires				
TWO CONDUCTORS						
24	7	7.99 x 10-3	0.024	0.016	0.057 x 0.114	5
22	7	0.010	0.030	0.024	0.079 x 0.157	9
20	7	0.013	0.038	0.031	0.102 x 0.205	16
18	10	0.013	0.046	0.031	0.108 x 0.217	19
16	16	0.013	0.058	0.031	0.122 x 0.244	28
14	26	0.013	0.074	0.047	0.169 x 0.339	50
12	28	0.015	0.093	0.047	0.189 x 0.378	69
10	44	0.015	0.117	0.047	0.213 x 0.425	98
THREE CONDUCTORS						
18	16	0.010	0.046	0.031	0.110 x 0.220	28

Colors: Black and White

For special constructions, please contact us.

The data listed above is approximate and subject to normal manufacturing tolerances. Specifications are subject to change without notice.

HC616 / 01 / NOV-05