


These specifications cover communication cables having soft annealed copper conductor HDPE insulation and flame retardant PVC jacket.

Construction elements

- A. Bare Copper Conductor
- B. HDPE insulation
- C. FR-PVC Jacket

APPLICATIONS

Communication cables, entrance door use in residential and commercial buildings, outdoor 75°C, 300 V.

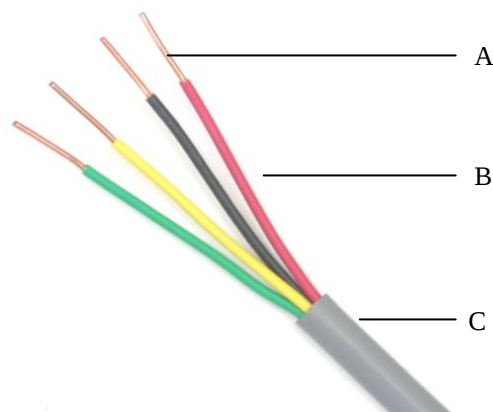

CMX (NEC ARTICLE 800)

CABLE DATA

Size (AWG)	Conductors	Insulation Thickness		Jacket Thickness		Outside Diameter		Weight	
		Inches	mm	Inches	mm	Inches	mm	Ibs./Kft.	Kg/km
4x24	4	0.008	0.20	0.02	0.51	0.12	3.1	10.1	15.0
4x22	4	0.008	0.23	0.02	0.51	0.18	3.70	17.9	21.3

Standard PUT-UPS: 500R/1000R

R: Reels

Conductor Colors: Yellow, Red, Green & Black

Jacket Color: White, Beige or Gray

HC597 / 02 / FEB-06

The data listed above is approximate and subject to normal manufacturing tolerances. Specifications are subject to change without notice.